



G-Pro2 5" pekskärm



Pellon 300



Pellon 400



Pellon 600

Noggrannhet i kraftfoderutfodringen

Pellon	300	400 (2W)	600 (2W)
Foder	1-4 olika foder		
Längd [mm]	700	1100	1100
Bredd [mm]	800	800	1100
Höjd [mm]	1450	1450	1650
Tomvikt [kg]	80	90	120
Vändradie [mm]	500		
Styrning	Pellon G-Pro2 5"		
Volym [l]	300	400	600
Effektbehov	Batteridrift		
Vallpojke	ja		

G-Pro2 5" pekskärm


Metoder

- Standardutfodring
- Kurvutfodring




Utfodringsinställningar

Platsutfodring



Grupputfodring

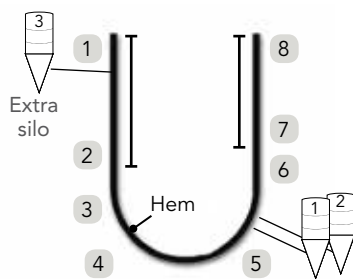

Åkvagnar

- Standard
- Power med utbytbar utväxling



Rälstyper

INP80

(Rekommenderas)


INP120

IPE120



Montering

Skenor och monteringsdelar från lager.

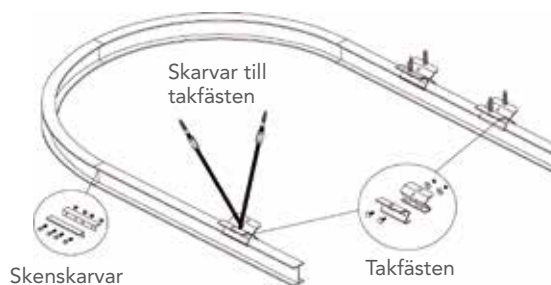

Tilläggsutrustning

Tvåsidig utfodring

Med tvärgående skruv eller matta möjliggörs tvåsidig uppdelning.



Fördelningskruv

Justerbar utfodringsbredd.




Tvärmatta

Vägning av band som tilläggsutrustning. Vägning av ett foder.



Skruvtyper

Matarskruvar för 1–4 olika foder

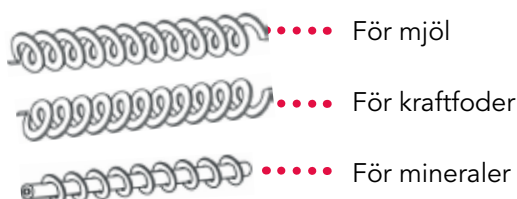

GSM-modem



YouTube

